




Instamic Remote App Guide

for iOS and Android

Version 1.6.5

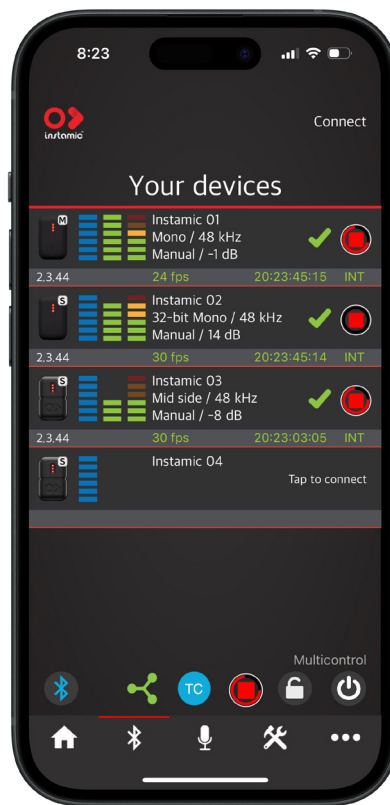

Revision 1.0

This document cannot be displayed properly on black-and-white displays.

© 2025 Instamic, Inc.

Copying or reprinting this manual in part or in whole without permission is prohibited.

Introduction

Hi there! Thank you for choosing Instamic! This Quick Start Guide will help you get started with the Instamic Remote app. This app is easy to use and allows you to completely control and configure your Instamics:

- Remote control up to 10 units with one mobile device
- Trigger multiple Instamics with one tap
- Live monitor and record directly to your phone (one-to-one connection)
- Set it up (Recording mode, Sampling rate, Auto-gain)
- Adjust the input gain (fader, gains presets)
- Lock the unit's button
- Turn the LEDs off and on
- Check the battery level, Bluetooth signal level, and remaining recording time
- Rename your Instamic
- Turn it off remotely

Copyrights

iPhone, iPad, and iPadOS are trademarks of Apple Inc.

App Store is a service mark of Apple Inc.

iOS is a trademark or registered trademark of Cisco Systems, Inc. in the USA and other countries and is used under license.

USB Type-C is a trademark of the USB Implementers Forum.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Instamic, Inc. is under license

Product names, registered trademarks and company names in this document are the property of their respective companies. All trademarks and registered trademarks in this document are for identification purposes only and are not intended to infringe on the copyrights of their respective owners.

Using with your iPhone or Android Device


Installing Instamic Remote

1. Open the App Store (or Google Play store) and search for Instamic Remote.
2. Tap "GET" on the Instamic Remote app
This will install Instamic Remote app on the device.




Connecting the app to your Instamic:


1. Power on your Instamic device.

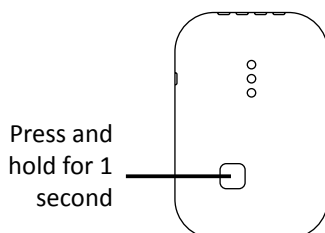


2. Tap the Instamic Remote app icon.
Instamic Remote app will launch. Your device will appear in the list.

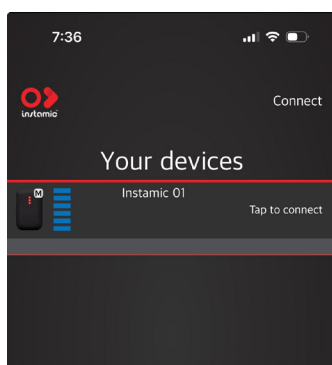

3. Tap the Instamic in the list to connect to it.
Once connected the device's configuration details will be displayed.

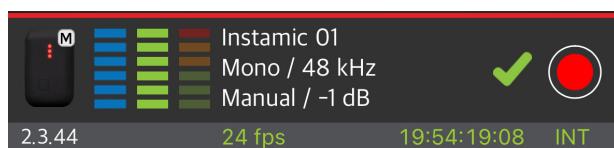

Instamic Remote Overview

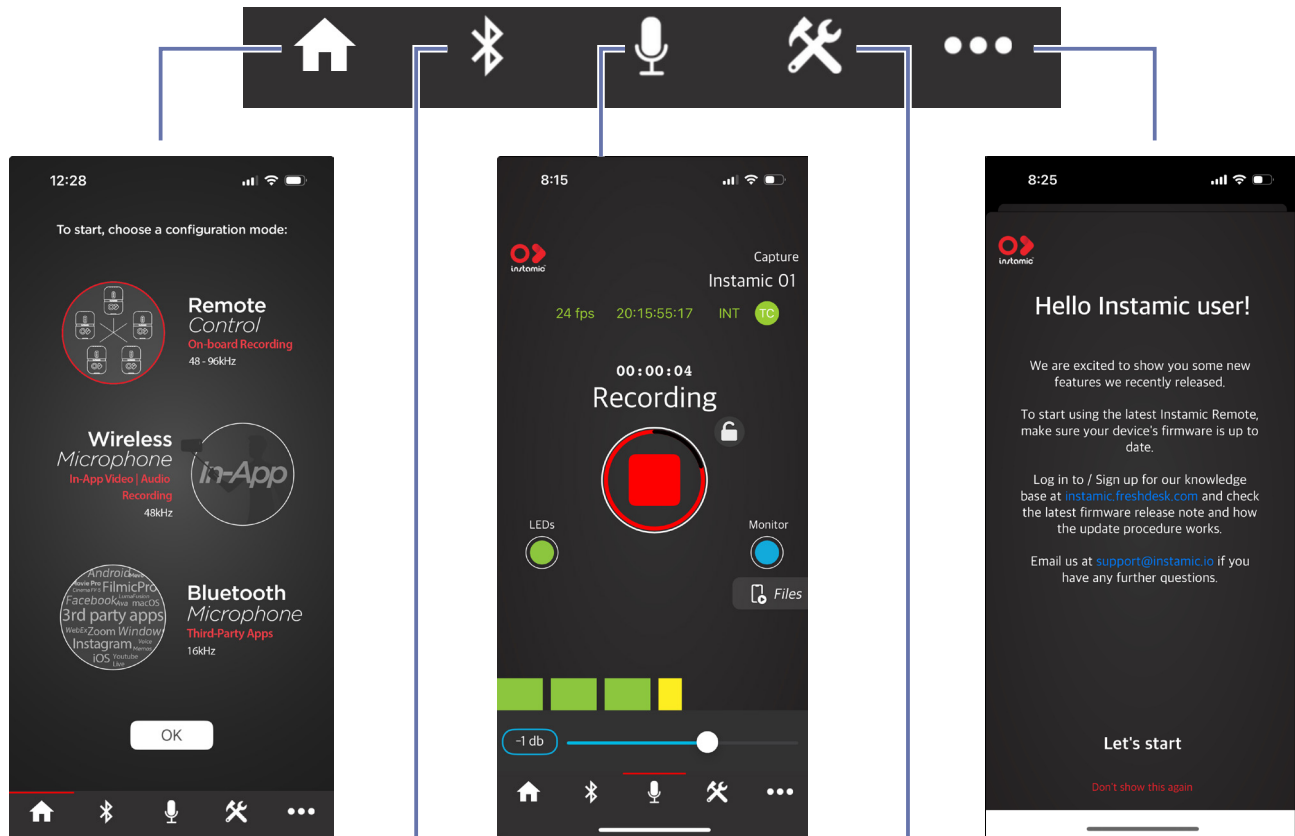

Home Page

Select one of three configurations: Remote Control, Wireless Microphone, Bluetooth Microphone

Capture Page


Remote control and monitor each microphone individually (input gain, VU meter, LEDs on-off, Time-code, rename, etc.).

More Info Page

Access the knowledge base for articles and videos.

Connect Page

Remote control up to 10 Instamics at the same time with the multi-control panel

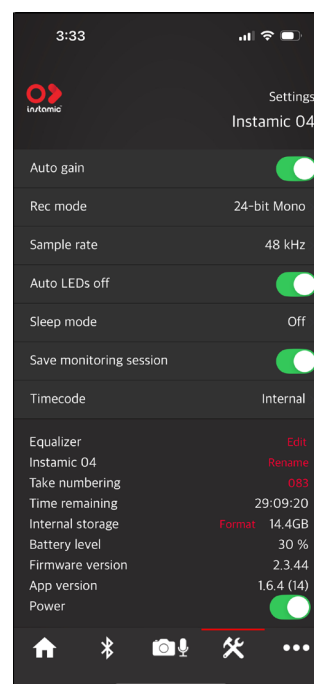


Settings Page

Configure each microphone: auto-gain, recording mode, sample rate, hands-free profile mode, sleep mode, rename, format, power it off, etc.

Configure your Instamic

Home Page Overview

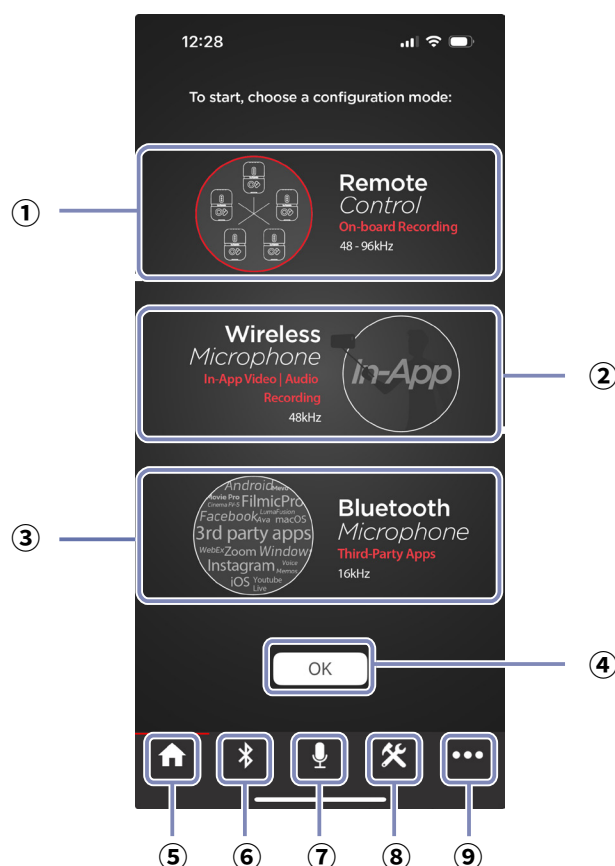

① Remote Control Mode

Remote control up to 10 units. Audio is recorded and stored on the device. Use this mode to capture highest quality audio (up to 32-bit, 96 kHz).

② Wireless Microphone Mode

Use this mode to capture video or audio in-app, at 48 kHz audio quality. Audio is streamed wirelessly from the Instamic to the phone and stored in the Instamic Remote folder. In this mode only one Instamic can be used at a time.

③ Bluetooth Microphone Mode

Transform Instamic into a Bluetooth microphone compatible with third-party apps or hardware (Filmic Pro, ProCamera, Insta360 Cameras, etc.)

④ OK button

Accepts current selection and opens the Connect Page.

⑤ Home Page button

⑥ Connect Page button


⑦ Capture Page button

⑧ Settings Page button

⑨ More info Page button

View and Control Devices Remotely

Connect Page Overview

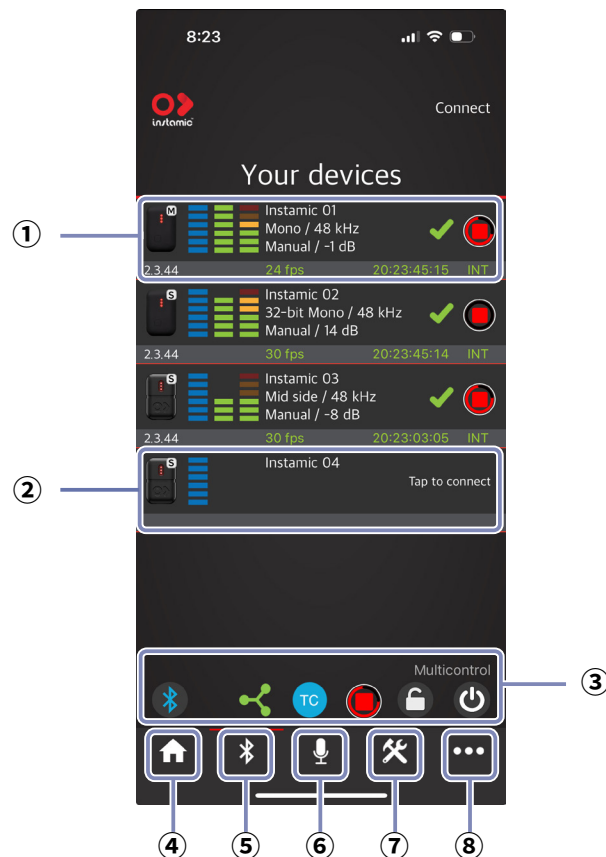

① Connected Device

From left to right: Instamic Version, Bluetooth signal strength, Battery level, VU Meter, Name, Recording mode/sample rate, Gain settings, connection status, firmware version, sync and control recording and frame rate.

② Disconnected Device

View Icon, Bluetooth strength, Device name.

③ Multicontrol Functions

Control multiple devices simultaneously, including bluetooth, connect/disconnect, timecode sync, record, lock and power.

④ Home Page button

⑤ Connect Page button


⑥ Capture Page button

⑦ Settings Page button

⑧ More Info Page button

View Settings for each Connected Instamic

Connected Device Status

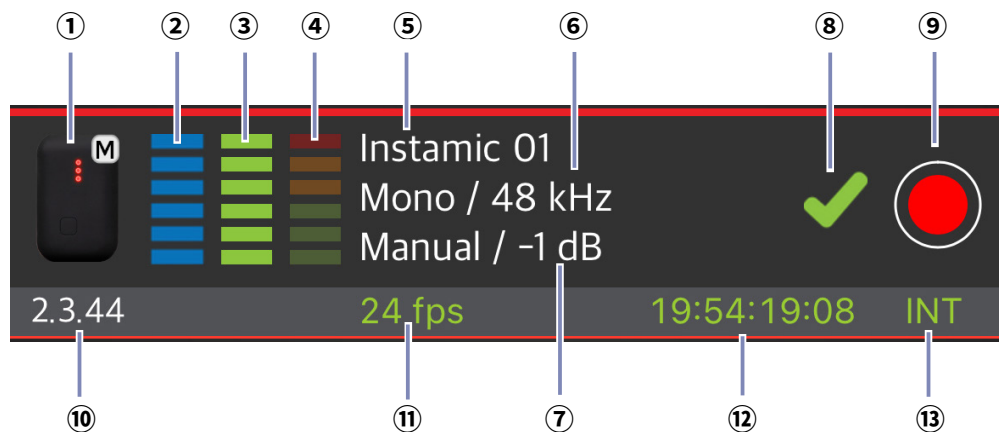

① **Device Version** (M=Mono S=Stereo)

② **Bluetooth Signal strength**

③ **Battery Level**

④ **Input Level VU Meter**

⑤ **Device Name**
Name the device from Settings or Capture Pages.

⑥ **Record Mode/Sample Rate**

24 or 32 bit, Mono/Stereo/Mid-Side, 48/96 kHz.
Editable from Settings Page.

⑦ **Manual or Auto / Gain Level**

When Auto=on, initial gain is measured and set when Record button it tapped. Gain level displays the current input level slider setting which is controlled from Capture Page.

⑧ **Connection Status**

Tap to connect. Long tap to disconnect.

⑨ **Record Start/Stop button**

Long tap to start. Long tap to stop.

⑩ **Device Firmware Version**

Keep up to date for best performance. Download the latest firmware from [Instamic support](#).

⑪ **Current Frame Rate**

Tap to change: 23.98, 24, 25, 29.97, 29.97 DF, 30 frames per second (fps).

⑫ **Timecode Display**


Helps you ensure sync between devices.

⑬ **Sync Status**

Indicates Internal or External Sync. Tap to edit.

Control up to 10 Instamics Simultaneously

Multicontrol Toolbar

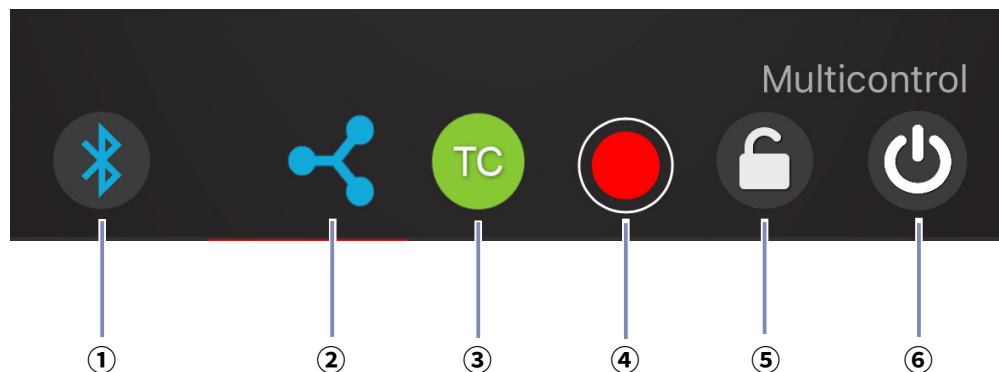

The Multicontrol Toolbar allows you to control up to 10 Instamics at the same time.

① Bluetooth Off button

Turns off Bluetooth connections of all connected units. Instamics will continue to operate. Turn units off and back on manually to reconnect.

④ Record Start/Stop button

Long tap to start or stop recording on all connected units. (Red = Not recording Red with spinning circle = Recording Gray = Disabled)

② Connect / Disconnect button

Tap to connect to all listed units. Long tap to disconnect from all listed units. (Blue Icon = Not all are connected Green Icon = All are connected)

⑤ Lock button

Tap to lock all connected units. Long tap to unlock all connected units. (Red Icon = Locked White Icon = Unlocked Gray Icon = Disabled)

③ Timecode Sync button


Tap to sync all connected units. (Blue Icon = All units NOT in sync Green = All units in sync)

⑥ Power Off button

Long tap to power off all connected units. (White Icon = Enabled Gray Icon = Disabled)

Control Recordings from the Capture Page

Capture Page Overview - Remote Control Mode

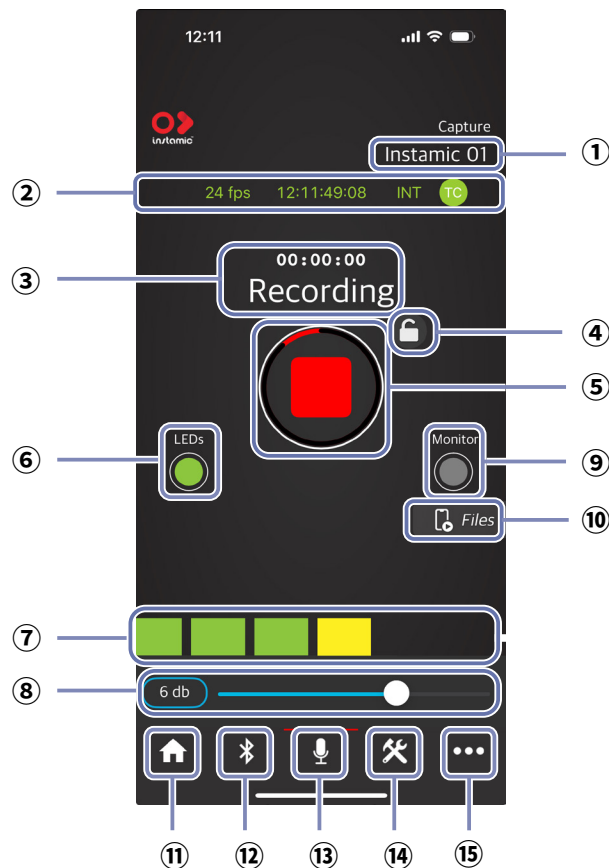

① **Instamic 01** Device Name (Tap to edit)

⑧ **Input Gain Slider**

② **24 fps 12:17:55:22 INT TC** Sync Toolbar and button

⑨ **Monitor** Monitor button (pre-recording levels)

Displays sync settings. Tap **TC** to sync all devices.

⑩ **Files** Files button

③ **00:00:02 Recording** Elapsed Time and Status Display

⑪ **Home** Home Page button

④ **Lock** Lock button

⑫ **Bluetooth** Connect Page button

⑤ **Record** Record button (tap to start/stop)

⑬ **Microphone** Capture Page button


⑥ **LEDs** Instamic LEDs on/off status and button

⑭ **Wrench** Settings Page button

⑦ **VU Meter** Input Level VU Meter

⑮ **More Info** More info Page button

Capture Page Overview - Wireless Microphone Mode

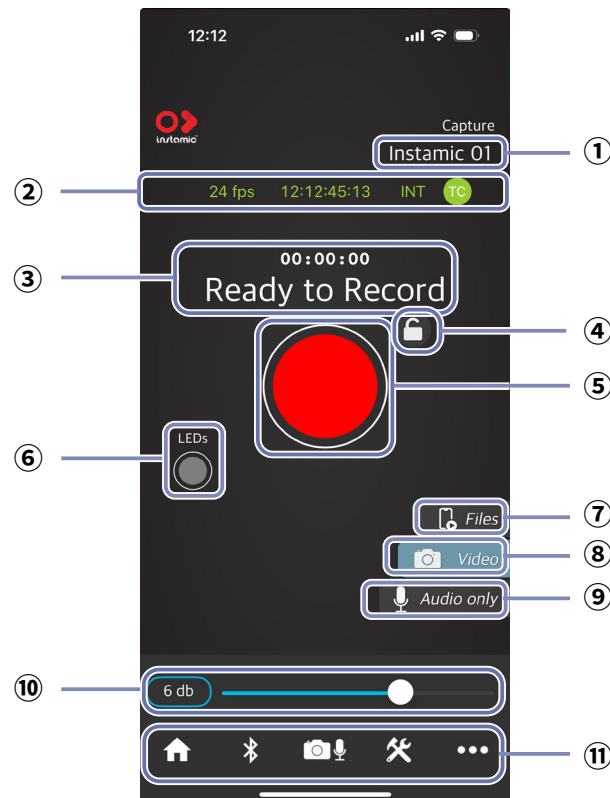

① **Instamic 01** Device Name (tap to edit)

② **24 fps 12:17:55:22 INT TC** Sync Toolbar and button

③ **00:00:02** Recording Elapsed Time and Status display

④ **Lock icon** Lock Button to protect from mishaps

⑤ **Record button** (tap to start/stop)

⑥ **LEDs** Instamic LEDs on/off status and button

⑦ **Files** Files Tab

Opens the Instamic Remote app folder on your device. View, play, edit, share audio and video recorded in the app.

⑧ **Video** In-app video tab

To record in-app video, tap the video tab followed by the record button. The Video capture page appears where you can record videos with audio streamed from your Instamic.

⑨ **Audio only** In-app audio tab


To record in-app audio, tap the audio tab followed by the record button. Audio will stream from your Instamic, where it will be recorded on your device.

⑩ **Input gain slider** (tap for presets)

⑪ **Navigation Bar**

See page 9 for a detailed description of the Navigation buttons.

Video Capture Page - Wireless Microphone Mode

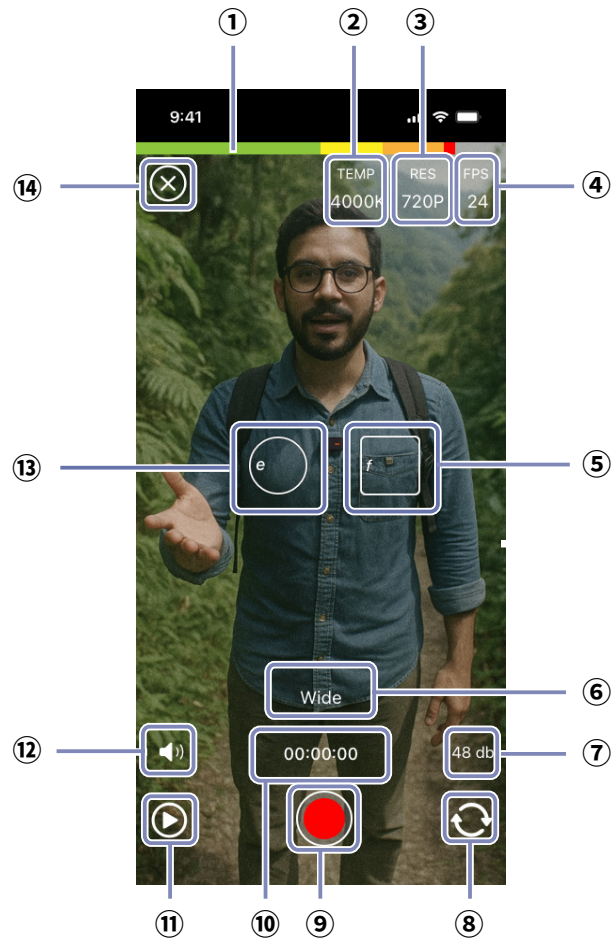

①  Input Level VU Meter

②  **Color Temperature** (White Balance)
Tap to select: 3200K (Tungsten), 4000K (Fluorescent), 4500K (Neutral), 5600K (Daylight), 6500K (Cloudy) and Auto.

③  **Video Resolution** (4K, 1080p-HD, 720p)

④  **Video Frame Rate**

⑤  **Focus Rectangle** (Drag to move Tap to lock)

⑥  **Camera Lens**

⑦  **Input Level Gain Slider** (Tap to show slider)

⑧  **Switch between front and back Cameras**

⑨  **Record Start/Stop**

⑩  **Elapsed Recording Time**

⑪  **Play recorded video and audio**

⑫  **Monitor audio button**

⑬  **Exposure Control +/-**



Drag to move, tap to lock, drag slider to adjust

⑭  **Close video capture view button**


Recording Video and Audio

When Instamic has been set to **Wireless Microphone Mode**, the Capture page allows you to record video or audio on your phone:



1. On the Home page, tap

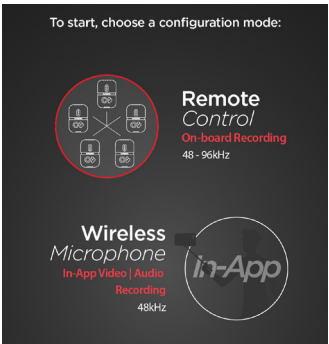

2. Tap the Instamic you want to stream audio from.

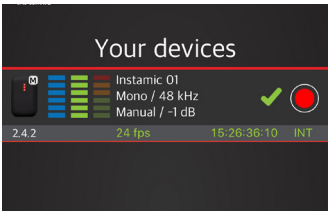


3. Tap the  to open the video capture page.

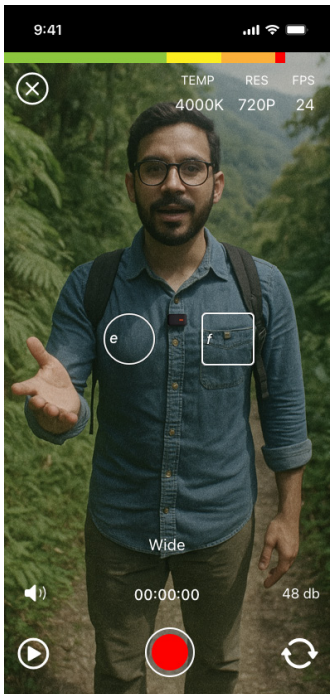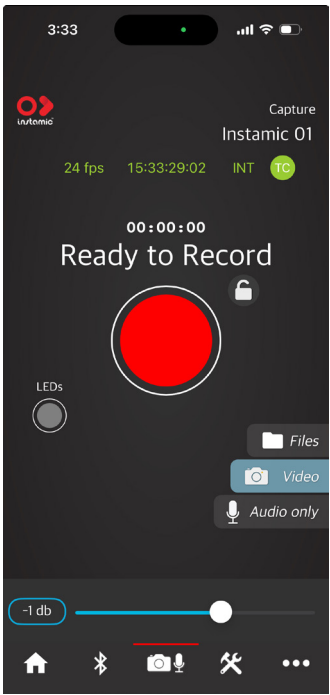

Change Settings on your Instamic

Settings Page Overview

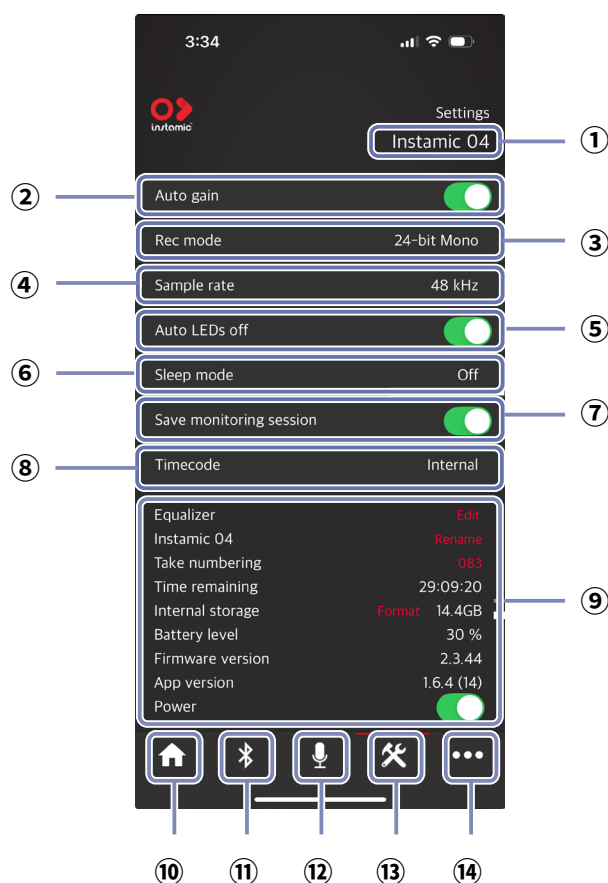

① **Instamic 01** Device Name (Tap **Rename** to edit)

② **Auto Gain**

When enabled, the app measures the incoming audio and sets the initial gain value.

③ **Recording (Rec) Modes**

Varies by device, 24-bit/32-bit Float, Mono/Dual Mono/Stereo/Mid-side

④ **Sample Rate** (48 kHz or 96 kHz)

⑤ **Auto LEDs Off**

When enabled, the LEDs on your Instamic will automatically shut off after 8 seconds.

⑥ **Sleep Mode** (Off, 15, 30, 60, 90, 120, custom)

Automatically powers off all connected devices after specified number of minutes.

⑦ **Save Monitoring Session**

Monitor audio and VU levels pre-recording

⑧ **Timecode**

⑨ *See page 14*

⑩  **Home Page button**


⑪  **Connect Page button**

⑫  **Capture Page button**

⑬  **Settings Page button**

⑭  **More info Page button**

Settings Page Overview, continued

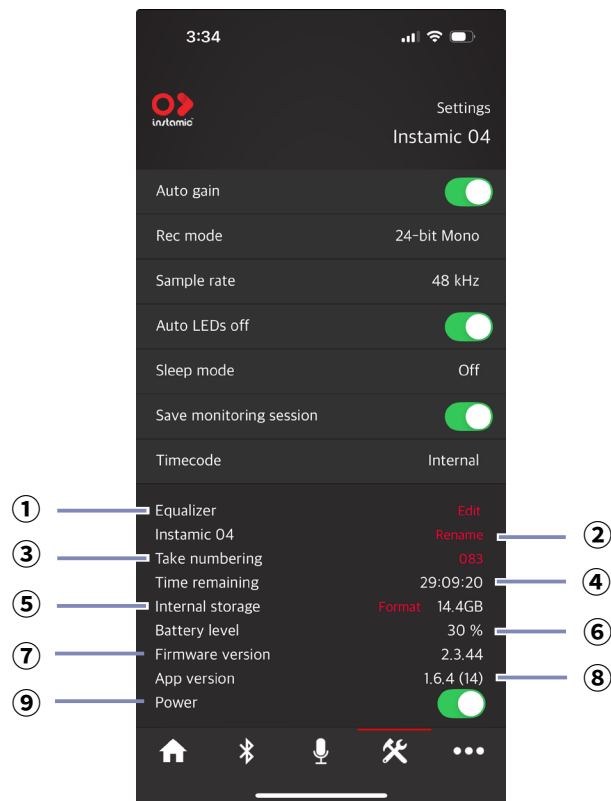

① Equalizer

3-band parametric EQ allows you to shape the tone of the recorded files.

② Rename your Instamic

Name your devices to make them easier to ID.

③ Take Numbering

Set the filename number of the next recording.

④ Time Remaining (HH:MM:SS)

Displays the remaining available recording time.

⑤ Internal Storage (XX.X GB)

Displays how much storage space remains on your Instamic

⑥ Battery level (%)

Displays the remaining battery level as a percent.

⑦ Firmware version

Displays firmware version on the unit.

⑧ App version

Displays version of the Instamic Remote app.

⑨ Power

Turn your Instamic on/off remotely.



© 2025 Instamic, Inc.

4-4-3 Kanda-surugadai, Chiyoda-ku, Tokyo 101-0062 Japan

zoomcorp.com

Copying or reprinting this manual in part or in whole without permission is prohibited.

Proper display not possible on grayscale devices